
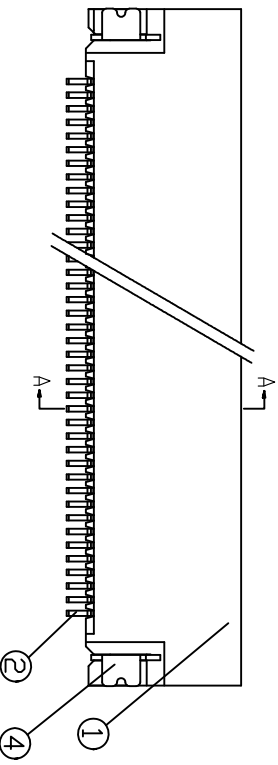

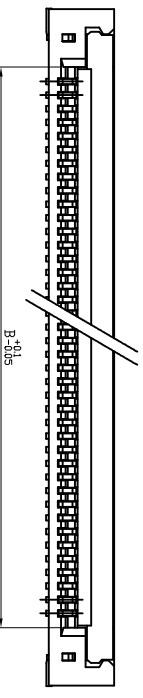
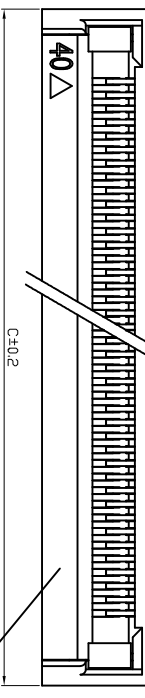
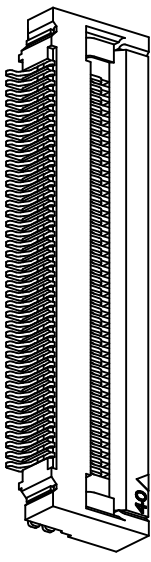


# 0.5-K KnPBX承认图面

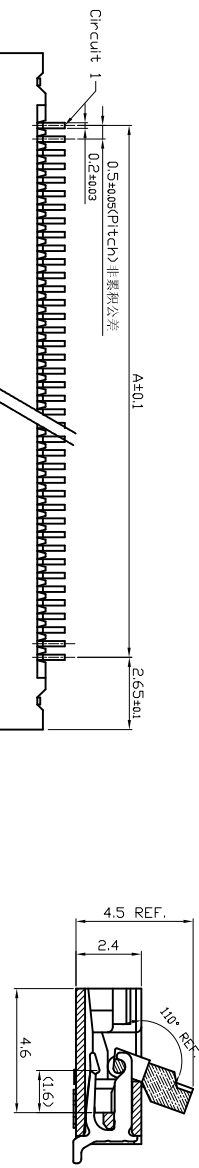

技术指标:

- 1、塑件表面应光洁、无毛刺、明显收缩、缺陷、裂纹等现象;
- 2、温度范围: -25° C~85° C;
- 3、额定电压: 50V, AC, DC(等效);
- 4、接触电阻: ≤0.03 Ω;
- 5、绝缘电阻: ≥500M Ω;
- 6、耐压: 500V, AC/minute.

ROHS管理规定:

- 1、禁止使用含有ROHS指令所限制的物质。
- 2、对应的SGS或TTS出具的ICP-AES数据、不可测定物质的成分表, 有效期一年。

Pin#	Type	A	B	C	Pin#	Type	A	B	C
4	0.5-18-4PBX	1.5	2.6	6.8	33	0.5-18-33PBX	16	17.1	21.3
5	0.5-18-5PBX	2	3.1	7.3	34	0.5-18-34PBX	16.5	17.6	21.8
6	0.5-18-6PBX	2.5	3.6	7.8	35	0.5-18-35PBX	17	18.1	22.3
7	0.5-18-7PBX	3	4.1	8.3	36	0.5-18-36PBX	17.5	18.6	22.8
8	0.5-18-8PBX	3.5	4.6	8.8	37	0.5-18-37PBX	18	19.1	23.3
9	0.5-18-9PBX	4	5.1	9.3	38	0.5-18-38PBX	18.5	19.6	23.8
10	0.5-18-10PBX	4.5	5.6	9.8	39	0.5-18-39PBX	19	20.1	24.3
11	0.5-18-11PBX	5	6.1	10.3	40	0.5-18-40PBX	19.5	20.6	24.8
12	0.5-18-12PBX	5.5	6.6	10.8	41	0.5-18-41PBX	20	21.1	25.3
13	0.5-18-13PBX	6	7.1	11.3	42	0.5-18-42PBX	20.5	21.6	25.8
14	0.5-18-14PBX	6.5	7.6	11.8	43	0.5-18-43PBX	21	22.1	26.3
15	0.5-18-15PBX	7	8.1	12.3	44	0.5-18-44PBX	21.5	22.6	26.8
16	0.5-18-16PBX	7.5	8.6	12.8	45	0.5-18-45PBX	22	23.1	27.3
17	0.5-18-17PBX	8	9.1	13.3	46	0.5-18-46PBX	22.5	23.6	27.8
18	0.5-18-18PBX	8.5	9.6	13.8	47	0.5-18-47PBX	23	24.1	28.3
19	0.5-18-19PBX	9	10.1	14.3	48	0.5-18-48PBX	23.5	24.6	28.8
20	0.5-18-20PBX	9.5	10.6	14.8	49	0.5-18-49PBX	24	25.1	29.3
21	0.5-18-21PBX	10	11.1	15.3	50	0.5-18-50PBX	24.5	25.6	29.8
22	0.5-18-22PBX	10.5	11.6	15.8	51	0.5-18-51PBX	25	26.1	30.3
23	0.5-18-23PBX	11	12.1	16.3	52	0.5-18-52PBX	25.5	26.6	30.8
24	0.5-18-24PBX	11.5	12.6	16.8	53	0.5-18-53PBX	26	27.1	31.3
25	0.5-18-25PBX	12	13.1	17.3	54	0.5-18-54PBX	26.5	27.6	31.8
26	0.5-18-26PBX	12.5	13.6	17.8	55	0.5-18-55PBX	27	28.1	32.3
27	0.5-18-27PBX	13	14.1	18.3	56	0.5-18-56PBX	27.5	28.6	32.8
28	0.5-18-28PBX	13.5	14.6	18.8	57	0.5-18-57PBX	28	29.1	33.3
29	0.5-18-29PBX	14	15.1	19.3	58	0.5-18-58PBX	28.5	29.6	33.8
30	0.5-18-30PBX	14.5	15.6	19.8	60	0.5-18-60PBX	29.5	30.6	34.8
31	0.5-18-31PBX	15	16.1	20.3					
32	0.5-18-32PBX	15.5	16.6	20.8					

序号	图号	名称	材料	数量	附注
4	164-0200-004	拼插 Fitting Mtd	磷青铜 Phosphor Bronze	2	磷青铜材料规格: 30V, 1MM, 磷0.00%MIN.
3	164-0400-003	物 Actuator	PA9T/LCP U94V-0I	1	匙
2	164-0100-002	好 Contact	磷青铜 Phosphor Bronze	nx1	磷青铜材料规格: 30V, 1MM, 磷0.00%MIN.
1	164-0300-001	盖 Housing	LCP (UL94V-0)	1	匙

深圳扬讯电子有限公司

未注公差	比例	Design Unit/Size	页码
X.° ±3° X.Y.° ±0.5°	10--30	METRIC	1 OF 1
±0.2	±0.25	MM Only	
±0.3	>30		

制作	审核	批准	材料	图号	Part No
李田忠	洪新江	李田忠	见图解	164-1000-020	F050180-**-1**

旧底图总号	
底图总号	
签字	
日期	

A	
B	
C	
D	
E	
F	
G	
H	
J	
K	
L	
M	

15	
14	
13	
12	
11	
10	
9	
8	
7	
6	
5	
4	
3	
2	
1	