


REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
A0	07/10/20	NEW		

PIN NO.	DIM A	DIM B	DIM C	DIM D
4	7.94	2.70	1.50	4.70
5	8.44	3.20	2.00	5.20
6	8.94	3.70	2.50	5.70
7	9.44	4.20	3.00	6.20
8	9.94	4.70	3.50	6.70
9	10.44	5.20	4.00	7.20
10	10.94	5.70	4.50	7.70
11	11.44	6.20	5.00	8.20
12	11.94	6.70	5.50	8.70
13	12.44	7.20	6.00	9.20
14	12.94	7.70	6.50	9.70
15	13.44	8.20	7.00	10.20
16	13.94	8.70	7.50	10.70
17	14.44	9.20	8.00	11.20
18	14.94	9.70	8.50	11.70
19	15.44	10.20	9.00	12.20
20	15.94	10.70	9.50	12.70
21	16.44	11.20	10.00	13.20
22	16.94	11.70	10.50	13.70
23	17.44	12.20	11.00	14.20
24	17.94	12.70	11.50	14.70
25	18.44	13.20	12.00	15.20
26	18.94	13.70	12.50	15.70
27	19.44	14.20	13.00	16.20
28	19.94	14.70	13.50	16.70
29	20.44	15.20	14.00	17.20
30	20.94	15.70	14.50	17.70
31	21.44	16.20	15.00	18.20
32	21.94	16.70	15.50	18.70
33	22.44	17.20	16.00	19.20
34	22.94	17.70	16.50	19.70
35	23.44	18.20	17.00	20.20
36	23.94	18.70	17.50	20.70
37	24.44	19.20	18.00	21.20
38	24.94	19.70	18.50	21.70
39	25.44	20.20	19.00	22.20
40	25.94	20.70	19.50	22.70
41	26.44	21.20	20.00	23.20
42	26.94	21.70	20.50	23.70
43	27.44	22.20	21.00	24.20
44	27.94	22.70	21.50	24.70
45	28.44	23.20	22.00	25.20
46	28.94	23.70	22.50	25.70
47	29.44	24.20	23.00	26.20
48	29.94	24.70	23.50	26.70
49	30.44	25.20	24.00	27.20
50	30.94	25.70	24.50	27.70
51	31.44	26.20	25.00	28.20
52	31.94	26.70	25.50	28.70
53	32.44	27.20	26.00	29.20
54	32.94	27.70	26.50	29.70
55	33.44	28.20	27.00	30.20
56	33.94	28.70	27.50	30.70
57	34.44	29.20	28.00	31.20
58	34.94	29.70	28.50	31.70
59	35.44	30.20	29.00	32.20
60	35.94	30.70	29.50	32.70

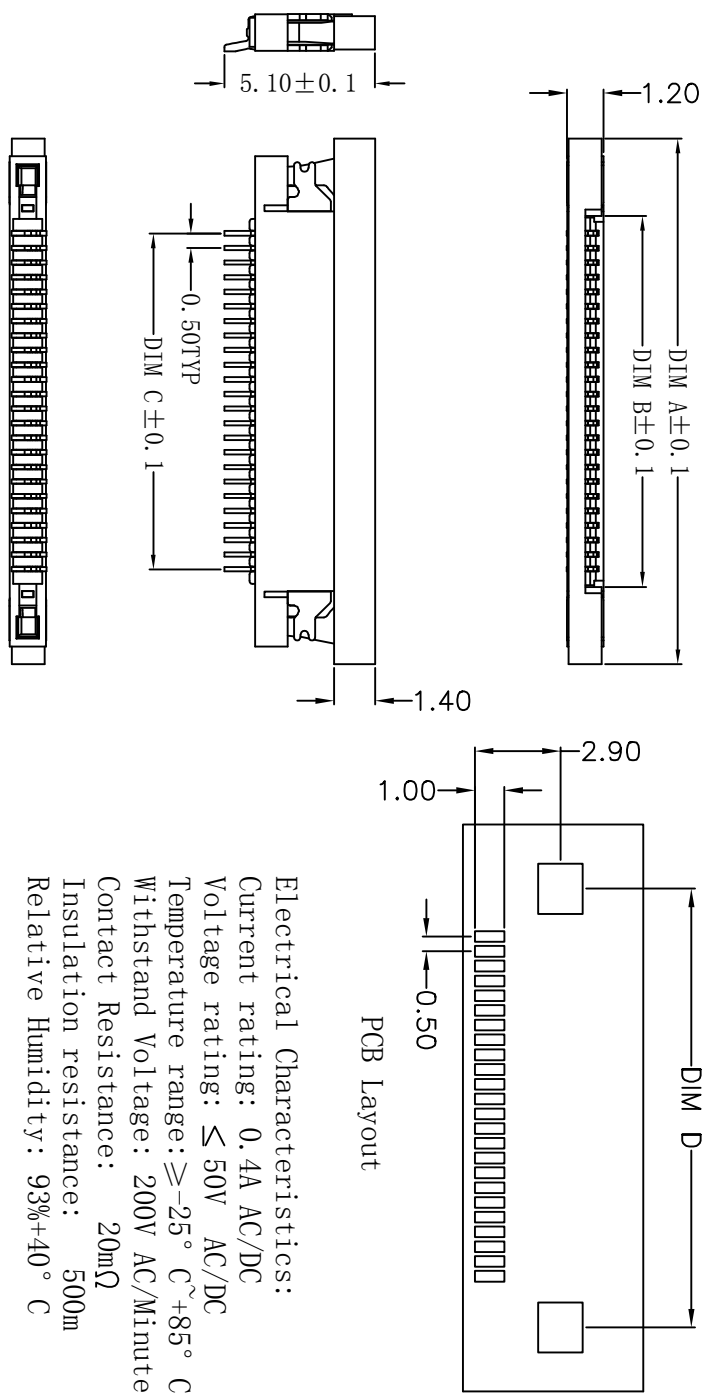

- NOTES:
1. PLASTIC BURRS 0.1MMMAX
 2. PARTNO. SPECIFICATION: 21-30-XX01-1
 30. UPPER CONT ACT NO. OF CONTACT DOOSE

Material Description:
 Contact: Phosphor Bronze Tin-Leadplated
 Solder Tab: Phosphor Bronze Tin-plated
 Housing: Thermoplastic (UL94V-0)
 Slider: Thermoplastic (UL94V-0)

Electrical Characteristics:
 Current rating: 0.4A AC/DC
 Voltage rating: ≤ 50V AC/DC
 Temperature range: ≥ -25° C ~ +85° C
 Withstand Voltage: 200V AC/Minute
 Contact Resistance: 20mΩ
 Insulation resistance: 500m
 Relative Humidity: 93%+40° C

OPERATION	DESIGN	chemminbin	3/19	SCALE	1:1	深圳扬讯电子有限公司
0.00 ± 0.15				UNIT	mm	
0.0 ± 0.30	CHECK			SIZE	A4	PFC-0512JL-A
0 ± 0.40				SHEET	1/1	FPC0.5 1.2H上接
Angle ± 3°	APPROVE			PROJ.		
DIM TOL				DRAWING NO.		